

Key Features

- ❑ J6412 CPU provide more economical choice with high performance and low power consumption;
- ❑ Smart hinge design, screen rotation and screen height can be adjusted more flexibly;
- ❑ 15.6"wide-screen POS display brings better experience;
- ❑ Cube X box design, more space-saving;



MODEL		HK568 J6412	
Processor		Intel Elkhart Lake J6412, Quad-core 2.0Ghz up to 2.6Ghz	
Operating System		Windows 10/Linux/Windows11 in 2023	
Memory		SO-DIMM DDR4 3200MHz 4GB, up to 16GB	
Storage		SATA SSD 128GB, up to 512GB	
		Optional SATA HDD 500GB	
		Optional M.2 SATA 128GB, up 256GB	
Display Panel		15.6 "LED widescreen /standard resolution: 1920 x 1080	
Touch Screen		True flat capacitive touch screen	
Power Supply		24V 60W(Standard) /24V 120W(optional)	
Speaker		1*2W Speaker	
Wireless Connection		Dual-band Wi-Fi® 802.11a/b/g/n/ac 2.4GHz/5GHz	
I/O Ports		4* USB 2.0 (1*24V Powered USB) 2*USB 3.0 (5 *Front 1*Side)	
		1* 100M/1000M Gigabit LAN	
		1*24V RJ11 for Cash drawer	
		3* RJ48 serial port	
		1*HDMI Port	
		1*Audio	
		1*12V for second display	
Dimensions (LxWxH)		317 × 386 × 205 mm	
Weight		6.5KG	
Optional Peripherals	Card Reader	MSR only (3 tracks MSR)	
		MSR+RFID (Supports MIFARE one and MIFARE CPU card)	
	Fingerprint reader	Fingerprint reader	
	Stand	Normal Desktop Stand	
		Heightened Desktop Stand for Vertical screen	
		Ground Stand for Kiosk	
		Turnable bracket(180° horizontal)	
	Wall Mount	Wall mount bracket	
	Camera for second display	Membership recognition camera	
		Face ID camera	
	Second display	15.6” second screen / resolution: 1920 x 1080(Touch/non-Touch)	
		10.1” second screen / resolution: 1280 x 800(Touch/non-Touch)	
		2x20 characters VFD	
Printer	Separate 80mm thermal printer		
wireless	Dual-band Wi-Fi® 802.11a/b/g/n/ac 2.4GHz/5GHz		
	BT5.0		
Cube X (optional)		80mm printer *1	2D scanner *1 (for mobile payment barcode only)
		80mm printer *1	2D scanner *1 (for both mobile payment and goods barcode)
			10W speaker *1

MODEL		HK568 J6412
Environment	Operating	0°C - 45°C/10%-90% RH non-condensing
	Storage	-10°C - 70°C/10%-90% RH non-condensing
EMC and Safety		FCC /CE / RoHS pending
Tilt Adjustment		0° - 45° (Vertical)
Colour		Black/ White




- Optional MSR
- Optional MSR+RFID
- Optional 15.6" second display
- Optional 10.1" second display
- Optional VFD



Disclaimer: All products specifications are subject to change without notice.

- Optional Camera
- Optional ground stand for Kiosk
- Optional CubeX

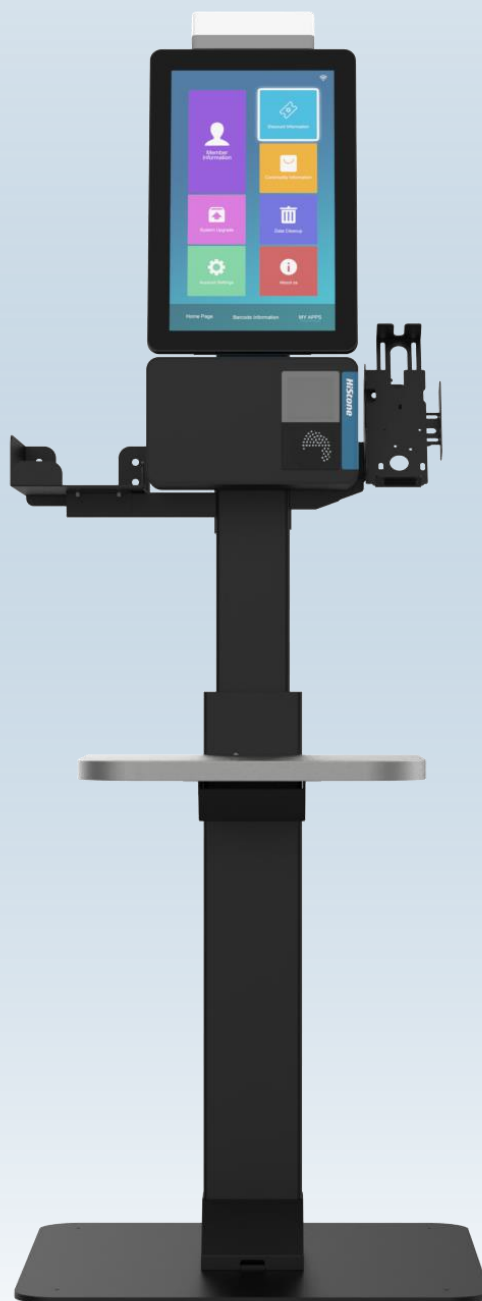

Disclaimer: All products specifications are subject to change without notice.

QINGDAO HISTONE INTELLIGENT COMMERCIAL SYSTEM CO.,LTD.
Wisdom Valley,NO.8 Shengshui Road, Laoshan District, Qingdao City, China.

Tel: +86 (532) 66069168

infopos@histonetec.com

www.hics.histonetec.com

HiStone